CONSTRUCTION DRG No.

R254/B191

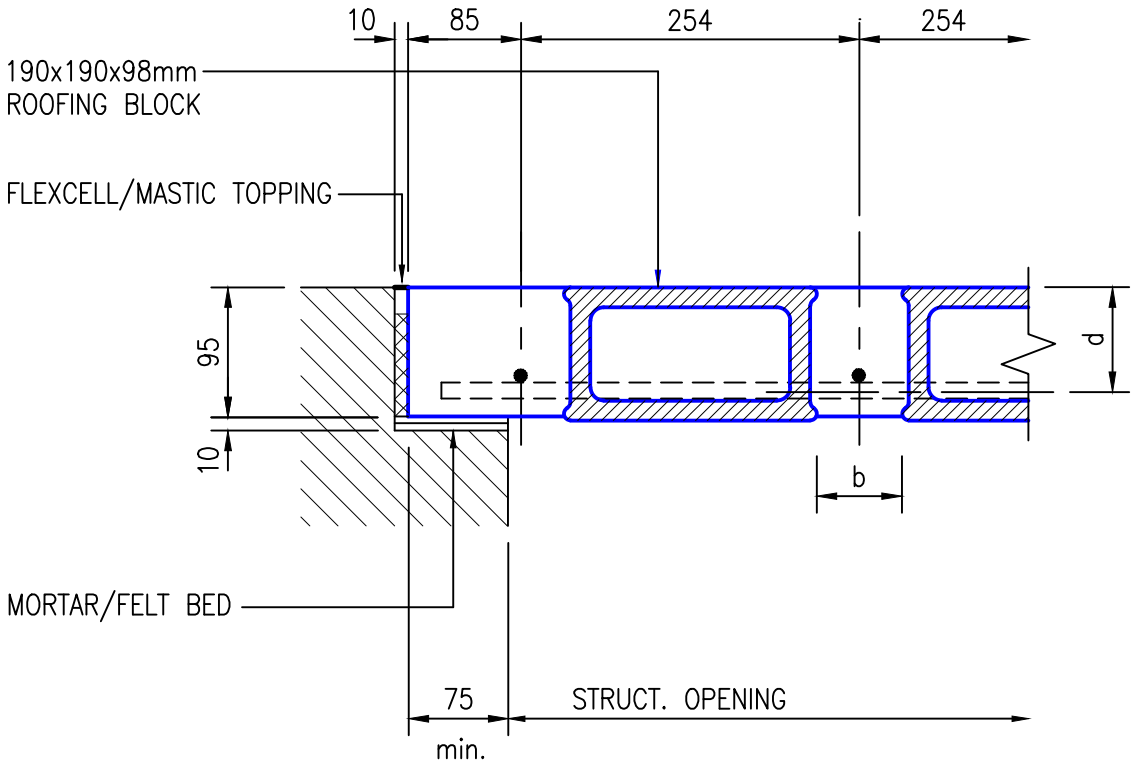

TYPICAL EDGE/CROSS SECTION

SUPERIMPOSED LOADING

1.5KN/M² – 2.600M Max. CLEAR SPAN
2.5KN/M² – 2.600M Max. CLEAR SPAN
5.0KN/M² – 2.060M Max. CLEAR SPAN
10.0KN/M² – 1.540M Max. CLEAR SPAN

CONCENTRATED LOADING

75KN ULTIMATE – N/A
SELF WEIGHT = 173kgs/M²

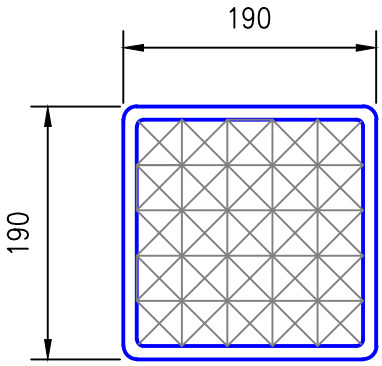

SATINA, PRISMATIC,
CLEARVIEW & SAHARA
LENS PATTERN
(SCALE=1:5.)

FOR DIMENSIONS 'a', 'b', 'c' and 'd' PLEASE REFER TO THE RELEVANT DESIGN CRITERIA DETAIL SHEET Nos. PL–SPAN1 to 9 inc.

luxcrete LIMITED

Unit 2 Firbank Industrial Estate
Dallow Road Luton
Bedfordshire
LU1 1TW

T:01582 488767
F:01582 724607
www.luxcrete.co.uk
E:enquiries@luxcrete.co.uk

LUXCRETE OPERATE A POLICY OF CONTINUAL IMPROVEMENT OF THEIR PRODUCTS. SPECIFICATIONS AND DETAILS ARE THEREFORE SUBJECT TO CHANGE WITHOUT NOTICE. ALL TECHNICAL INFORMATION CONTAINED WITHIN THIS DETAIL SHEET IS FOR GUIDANCE ONLY AND MAY BE INAPPROPRIATE UNDER PARTICULAR CONDITIONS.

© 2011 COPYRIGHT LUXCRETE LTD